


# AcuCT Flex Series

## Rogowski Coil CT Datasheet

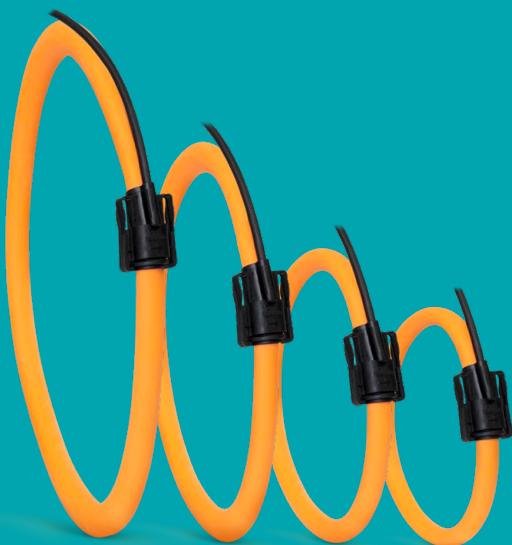

Accuenergy's AcuCT Flex Series Rogowski coil current transformers are engineered for high-accuracy measurements of AC current. Ideal for precision power metering, PQ analysis, or general energy monitoring applications, the versatile AcuCT Flex is essential when space is limited and rigid-body current transformers won't fit. The rope-like form factor can easily wrap around irregularly shaped conductors in crowded panels or switchgear.

## Features

- High accuracy measurements for rigorous applications
- Broad frequency range is well-suited for measuring harmonics & power quality
- Current input range: 5A - 50,000A AC
- Available in four, standard lengths: 16", 24", 36" or 47"
- Does not require an external power supply or integrator when used with Accuenergy meters
- Fully customize output ratio, input ratio, and length to adapt to any project

**ACCUENERGY**

## Specifications

### RATED CURRENT

Current Range	5A-50,000A
Accuracy	IEC 61869-10 Class 0.5, IEEE C57.13 Class 0.6

### MECHANICAL/ENVIRONMENTAL

Form Factor	Flexible Rope Like CT
Window Size	RCT16 - 106.0mm (4.17") RCT24 - 178.0mm (7.01") RCT36 - 271.0mm (10.67") RCT47 - 369.0mm (14.53")
External Diameter	RCT16 - 143.0mm (5.63") RCT24 - 207.0mm (8.13") RCT36 - 302.0mm (11.89") RCT47 - 398.0mm (15.66")
Length of Coil	RCT16 - 400.0mm (15.75") RCT24 - 600.0mm (23.62") RCT36 - 900.0mm (35.43") RCT47 - 1200.0mm (47.24")
Case Material	Orange thermoplastic rubber UL 94V-0 rated flame retardant
Lead Wires	1000V UL Style 20940, 26AWG
Operating Temperature	-20°C to 70°C / -4°F to 158°F
Temperature Drift	+/- 0.007% per °C
Operating Humidity	Non-condensing, 0 to 95% RH
Installation Conditions	IP61


### ELECTRICAL

Wire Polarity	White=Positive, Brown=Negative, Bare=Shield
Phase Orientation	Arrow Points Towards Load
Frequency Range	45Hz - 65Hz
Frequency Response	10Hz - 20KHz

### SAFETY/COMPLIANCE

Working Voltage	1000V CAT III, 600V CAT IV
Dielectric Strength	7400Vac @ 50/60Hz for 1 minute
Certifications	CE, RoHS, cURus (E359521)

## Dimensions

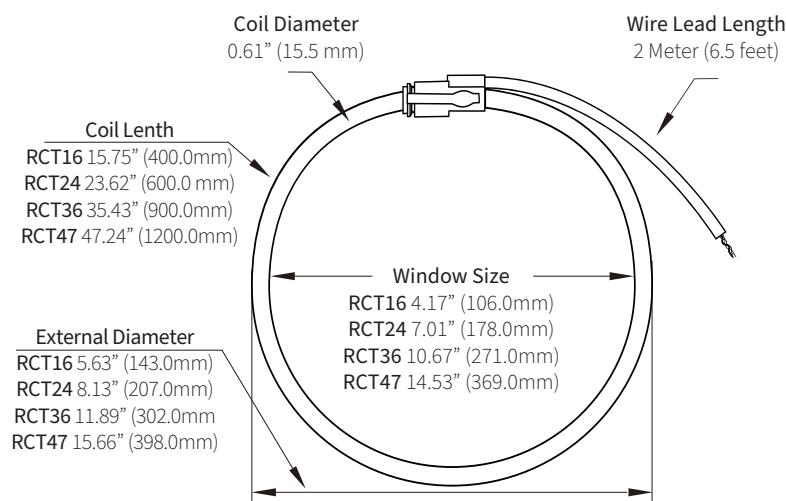

## mV/kA Output Standard & Custom Output

Multiple output ratio options are available such as 100mV/1000A, 40mV/1000A, 25mV/1000A, 10mV/1000A.

Model <sup>1</sup>	Output /1000A @60Hz	Output /1000A @50Hz	Calibrated Range with "RCT" input devices <sup>2</sup>
RCTxx-200	600mV	500mV	1A-240A
RCTxx-500	240mV	200mV	2.5A-600A
RCTxx-1000	120mV	100mV	5A-1200A
RCTxx-2500	48mV	40mV	12.5A-3000A
RCTxx-5000	24mV	20mV	25A-6000A
RCTxx-10000	12mV	10mV	50A-12000A
RCTxx-50000	2.4mV	2mV	250A-60000A
RCTxx-Custom	Output any ratio of signal per your requirement. Contact Us at <b>1-877-721-8908</b> or email <a href="mailto:marketing@accuenergy.com">marketing@accuenergy.com</a>		

<sup>1</sup>"xx" denotes length of current transformer coil.

<sup>2</sup>When used with Accuenergy meters. Performance and range may vary when used with non-Accuenergy power meters or devices.

## Options

### BNC Connector

For a fast, secure, and reliable connection to devices, the AcuCT Flex Rogowski Coils comes with a BNC Connector option. Its ring-lock mechanism firmly secures the lead wire in place for peace of mind installation.

### Extended Temperature Rating

The Extended Temperature Rating is designed for the AcuCT Flex Series to perform continuously under extreme temperature environments ranging from -45C to 125C (-49 to 257F) without sacrificing high precision.

### IP68 Environmental Protection

When environmental conditions are challenging, the AcuCT Flex IP68 Rated option confidently protects its electrical components from dust, dirt, and solid ingress and provides total water protection with its waterproof enclosure.

## Accessories

### RCT GRIP Kit

The RCT Guaranteed Rogowski Installation Performance (GRIP) Kit securely holds the AcuCT Flex Rogowski coil in place, ensuring proper alignment around the conductor. By preventing shifts or misalignment, it maintains optimal measurement accuracy and long-term stability, ideal for revenue-grade metering. Designed for quick, easy installation, the GRIP Kit also reduces strain on the coil while ensuring precise current readings.

**Note:** The RCT GRIP is sold separately.



## Ordering Information

Ordering Number	Model	Rated Current	Lead Length	Options
<b>Ordering Example</b>	<b>RCT24</b>	<b>5000</b>	<b>25m</b>	<b>BNC-ET-IP68</b>
	RCT16	200	Blank - 2 Meters (6.5ft) Standard	BNC
	RCT24	500	5M - 5 Meters/16.4ft	ET
	RCT36	1000	10M - Meters/32.8ft	IP68
	RCT47	2500	25M - 25 Meters/82ft	
		5000	50M - 50 Meters/164ft	
		10000		
		50000		



### Accuenergy Inc.

Los Angeles - Toronto - Pretoria

North America Toll Free: 1-877-721-8908

Web: [www.accuenergy.com](http://www.accuenergy.com)

Email: [marketing@accuenergy.com](mailto:marketing@accuenergy.com)

Revision Date: December 2025 Version: 1.0.5

Specs Subject To Change Without Notice.