

Basic Non Fail-Safe modulating actuator for controlling dampers in typical commercial HVAC applications.

- Torque motor 180 in-lb [20 Nm]
- Nominal voltage AC/DC 24 V
- Control modulating



AMB24-SR





Technical data

Electrical data	Nominal voltage	AC/DC 24 V
	Nominal voltage frequency	50/60 Hz
	Nominal voltage range	AC 19.228.8 V / DC 21.628.8 V
	Power consumption in operation	2.5 W
	Power consumption in rest position	0.4 W
	Transformer sizing	5 VA
	Electrical Connection	18 GA plenum cable, 1 m, with 1/2" conduit connector, degree of protection NEMA 2 / IP54
	Overload Protection	electronic throughout 095° rotation
Functional data	Torque motor	180 in-lb [20 Nm]
	Operating range Y	210 V
	Operating range Y note	420 mA w/ ZG-R01 (500 Ω, 1/4 W resistor)
	Input impedance	100 kΩ for 210 V (0.1 mA), 500 Ω for 420 mA
	Position feedback U	210 V
	Position feedback U note	Max. 0.5 mA
	Direction of motion motor	selectable with switch 0/1
	Manual override	external push button
	Angle of rotation	Max. 95°
	Angle of rotation note	adjustable with mechanical stop
	Running Time (Motor)	95 s / 90°
	Running time motor note	constant, independent of load
	Noise level, motor	45 dB(A)
	Position indication	Mechanical, 3065 mm stroke
Safety data	Power source UL	Class 2 Supply
	Degree of protection IEC/EN	IP54
	Degree of protection NEMA/UL	NEMA 2
	Enclosure	UL Enclosure Type 2
	Agency Listing	cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02
		CE acc. to 2014/30/EU and 2014/35/EU
	Quality Standard	ISO 9001
	UL 2043 Compliant	Suitable for use in air plenums per Section 300.22(C) of the NEC and Section 602 of the IMC
	Ambient humidity	Max. 95% RH, non-condensing
	Ambient temperature	-22122°F [-3050°C]
	Storage temperature	-40176°F [-4080°C]
	Servicing	maintenance-free
Weight	Weight	2.5 lb [1.1 kg]



Technical data sheet

AMB24-SR

Materials	Housing material	UL94-5VA
Footnotes	†Rated Impulse Voltage 80	0V, Type action 1, Control Pollution Degree 3.
Product features		
Application		n of dampers in HVAC systems. Actuator sizing should be done in er manufacturer's specifications.
	universal clamp, 1/2" self-c	rectly to a damper shaft up to 1.05" in diameter by means of its entered default. A crank arm and several mounting brackets are here the actuator cannot be direct coupled to the damper shaft.
	to 20 mA control input from	sponse to a 2 to 10 VDC, or with the addition of a 500 Ω resistor, a 4 n an electronic controller or positioner. A 2 to 10 VDC feedback signal ication or primary and secondary applications.
Operation		d with and does not require any limit switches, but is electronically . The anti-rotation strap supplied with the actuator will prevent
	actuator. When reaching th	95° of rotation and a visual indicator indicates position of the e damper or actuator end position, the actuator automatically stops. disengaged with a button on the actuator cover.
	Application Specific Integra rotation and provides a dig	rs use a sensorless brushless DC motor, which is controlled by an ted Circuit (ASIC). The ASIC monitors and controls the actuator's ital rotation sensing (DRS) function to prevent damage to the . Power consumption is reduced in holding mode.
		r feedback potentiometers are easily fastened directly onto the
Typical specification	crank arm and linkage and Actuators must provide pro addition of a 500 Ω resistor positioner. Actuators shall at all angles of rotation. Ac cover. If required, actuator (AMX24-SR-T and NMX24-S VDC feedback signal shall b have a 5-year warranty, an	er actuators shall be electronic direct-coupled type, which require no be capable of direct mounting to a shaft up to 3/4" diameter. portional damper control in response to a 2 to 10 VDC or, with the , a 4 to 20 mA control input from an electronic controller or have brushless DC motor technology and be protected from overload cuators shall have reversing switch and manual override on the will be provided with screw terminal strip for electrical connections R-T). Run time shall be constant and independent of torque. A 2 to 10 be provided for position indication. Actuators shall be cULus listed, d be manufactured under ISO 9001 International Quality Control be as manufactured by Belimo.
Accessories		

Electrical accessories	Description	Туре
	Battery backup system, for non-spring return models	NSV24 US
	Battery, 12 V, 1.2 Ah (two required)	NSV-BAT
	Auxiliary switch 2 x SPDT add-on	S2A



Technical data sheet

Mechanical accessories	Description	Туре
	Clamp NM/AM 1/2", 3/4", 1"	K-AM25
	Shaft clamp reversible, clamping range ø1020 mm	K-SA
	Mounting bracket for AF	ZG-100
	Mounting bracket	ZG-101
	Mounting bracket	ZG-103
	Mounting bracket	ZG-104
	Mounting kit for linkage operation for flat installation	ZG-NMA
	1" diameter jackshaft adaptor (11" L).	ZG-JSA-1
	1-5/16" diameter jackshaft adaptor (12" L).	ZG-JSA-2
	1.05" diameter jackshaft adaptor (12" L).	ZG-JSA-3
	Base plate extension for SMA to SM/AM/SMD24R	Z-SMA
	Weather shield 13x8x6" [330x203x152 mm] (LxWxH)	ZS-100
	Weather shield 406x213x102 mm [16x8-3/8x4"] (LxWxH)	ZS-150
	Explosion proof housing 16x10x6.435" [406x254x164 mm] (LxWxH), UL	ZS-260
	and CSA, Class I, Zone 1&2, Groups B, C, D, (NEMA 7), Class III, Hazardous (classified) Locations	
	Weather shield 17-1/4x8-3/4x5-1/2" [438x222x140 mm] (LxWxH), NEMA 4X, with mounting brackets	ZS-300
	Weather shield 17-1/4x8-3/4x5-1/2" [438x222x140 mm] (LxWxH), NEMA 4X, with mounting brackets	ZS-300-5
	Terminal-strip cover for NEMA 2 rating (-T models).	ZS-T
	Shaft extension 240 mm ø20 mm for damper shaft ø822.7 mm	AV8-25
	Actuator arm for standard shaft clamp	AH-GMA
	Wrench 0.32 in and 0.39 in [8 mm and 10 mm]	TOOL-06
	Linkage kit	ZG-JSL
	Jackshaft Retrofit Linkage with Belimo Rotary Actuators	


Electrical installation

A Provide overload protection and disconnect as required.

A Only connect common to negative (-) leg of control circuits.

A 500 Ω resistor (ZG-R01) converts the 4...20 mA control signal to 2...10 V.

Actuators may be connected in parallel if not mechanically linked. Power consumption and input impedance must be observed.

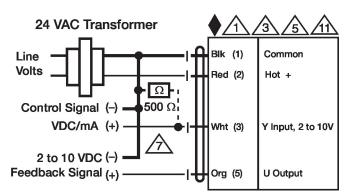

2...10 V / 4...20 mA Control



