

Belimo Energy Valve™ & Thermal Energy Meter





Transparent tenant billing



The new Energy Valve and Thermal Energy Meter provide energy control and efficient energy billing. Accurate measurement and monitoring of energy consumption in a heating and cooling system with direct IoT-based cost accounting using a single device. They are designed to EN1434/MID standards, ensuring high accuracy and reliability, allowing for transparent tenant billing. Belimo is stepping into a new era of integrated thermal energy management.

Energy savings you can see

The Belimo Energy Valve is an IoT cloud-connected pressure independent valve that monitors coil performance and energy consumption while maintaining Delta T. With a patented glycol monitoring and compensation feature that provides accurate, repeatability flow measurement and ensures glycol content meets design requirements.



Cloud Optimization

Monitors and enhances energy usage delivering optimal system performance. System analytics are also provided to show historical performance.



Delta T Management

The Belimo Delta T Manager algorithm reduces pumping and chiller/boiler operating costs by increasing plant efficiency and maintaining design Delta T.




Energy Monitoring

An integrated energy meter provides accurate coil and energy consumption data for tenant billing. The data is used to verify system performance after commissioning and acts as a baseline. This feature helps achieve LEED points through Energy and Atmosphere within credits 1 and 5.

"The installation of Energy
Valves in Citizens Plaza, Rachel
Jackson, and the Andrew
Jackson building was a major
success. The results exceeded
my expectations. We now have
savings that we can see."

Chad Lovell, Operations and Safety Specialist Jones Lang LaSalle

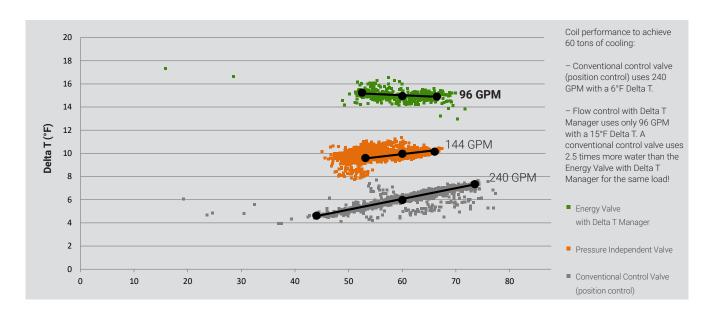

Key features at a glance

Certified metering, MID approval

The requirements meet EN 1434 and type approval according to the EU MID 2014/32/EU (MI-004).



Digitally supported workflows

The Belimo Assistant App guides you through the setup process.



IoT-based billing

Owner-authorized third parties are able to securely access data consumption and provide billing services.



Easy integration

Using BACnet IP or MSTP, Modbus TCP or RTU, the Energy Valve can easily communicate directly to the BMS.



Power over Ethernet (PoE)


The device can connect with one standard Ethernet cable that provides power and allows data transmission.



Modular design

The unit consists of two temperature sensors and a BTU meter with metering and logic functionality.



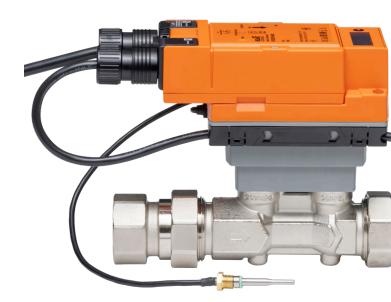



Easy interaction through NFC

Quick data access, field adjustable,

commissioning and troubleshooting with the Belimo Assistant App and a smartphone.



Energy monitoring

The thermal energy data is accurately measured, logged, and identifies areas for optimization when detected.



Glycol measurement and compensation

Equip with a patented glycol algorithm that compensates to ensure accurate readings.



Delta T Manager

Logic built-in monitor coil performance and optimize the available energy of the coil by maintaining the Delta T.



Dynamic Coil Performance

Accurately provides transparency in power degradation and other operational issues in real-time.



Cloud Connection

The Energy Valve connected to the Belimo Cloud provides secure, easy access to data and reports anytime from anywhere.





Power Control

Allows the power output to be set to a specific value providing a linear response, making the coil and valve characteristic irrelevant allowing the Energy Valve to be both pressure and temperature independent.

Thermal Energy Meter

Belimo's new Thermal Energy Meters are designed according to EN1434/MID standards and provide remote IoT-based billing. The energy meters have a patented glycol monitoring and compensation feature that provides accurate, repeatability flow measurement and ensures glycol content meets design requirements. The thermal energy meters incorporate ultrasonic transit time technology with no moving parts eliminating wear over time. Each unit is individually wet calibrated to ensure accuracy and repeatability over the life of the product. The meters offer accurate and reliable measurement of energy consumed, providing customers with the information required to analyze their consumption and control costs.









FEATURES

- IoT-based Billing

Thermal energy meters offer Ethernet connectivity to support remote IoT metering and billing.

Glycol Measurement and Compensation

Energy meters are equipped with a patented glycol compensation algorithm that automatically selects the correct glycol concentration to provide precise flow and energy measurement, ensuring reliable measurement and eliminating manual input and inaccuracy.

Seamless Integration

With BACnet/IP or MSTP, Modbus TCP or RTU (always on board), the thermal energy meter can communicate directly to the BMS.

- Optional PoE

The thermal energy meter can connect with one standard Ethernet cable providing power and data transmission simplifying installation.

- Built-in Data Logger

Built-in data logger captures the energy, flow, and operational data for further system optimization and efficiency.

- Digitally Access

Easily set or adjust parameters using NFC and the Belimo Assistant App or a web server.

End Fittings	Size	GPM Range	"EN1434 Approval 2014/32/EU (MID)"	Monitors	Compensates	Alarm	Display
NET	1/2" - 2"	6.6 - 100		•	•		
NPT	1/2"- 2"	6.6 - 66		•	•	•	•

Belimo Energy Valve™

The Energy Valve has a patented Power Control and Belimo Delta T Manager™ logic built in to monitor coil performance and optimize the available energy of the coil by maintaining Delta T. In addition to the standard analog signal and feedback wiring, it communicates its data to the Building Management System (BMS) via BACnet MS/TP or BACnet IP as well as Modbus RTU and Modbus TCP/IP. The built-in web server enables clear visualization of the valves' operation in real time. Performance data is stored for 13 months on board the valve. Cloud data provides lifetime data access.



FEATURES

Delta T Optimization & Flow Setpoints
 Cloud analytics provide recommended
 Delta T and flow setpoints which can be updated remotely or automatically to save time and improve efficiency.

- Performance Reporting

Key performance indicators are graphically illustrated showing current and historical performance data of flow rates, energy usage, Delta T, and other points of interest.

- Optional PoE

The device can be powered, and the data transferred directly via an Ethernet cable (PoE)

- Online Tech Support

Belimo's industry leading technical support team available to assist you remotely.

Software Updates

Latest software and security updates automatically provided for maximum productivity and reliability.







End Fittings	Size	GPM Range	"EN1434 Approval 2014/32/EU (MID)"	Monitors	Compensates	Alarm
NDT	1/2"- 2"	2.0 - 100		•	•	
NPT	1/2"- 2"	2.0 - 66		•	•	
Flanged (ANSI 125)	2½" - 6"	38 - 713		•	•	
Flanged (ANSI 250)	2½" - 6"	38 - 713				

Digitally supported

Webview


Safe and easy interaction through NFC with the Belimo Assistant App and your smart phone provides quick data access, field adjustable, commissioning, and troubleshooting. Configure and ensure proper performance. Local override function for commissioning and maintenance during operation (when powered) is possible with a few clicks. More transparency, easily read and forward parameters for more efficient operation.

Webview is an onboard graphical user interface that provides the ability to easily configure and change parameters on the Thermal Energy Meter and Energy Valve. The operation overview provides flows, temperatures, energy, glycol concentration, Delta T, operational errors, and other system information, along with historical trend data. Below is an example of the overview page of Webview for the Energy Valve.

Cloud Connection

Connecting to the Belimo cloud offers a variety of benefits. By maintaining the Energy Valve in the cloud, authorized users can interact with the data directly or change parameters. Device owners can approve third-party vendors to integrate API via the cloud, enabling additional features such as billing or analytical services; the possibilities are endless.

South Side AHU (22107-00004-022-182)

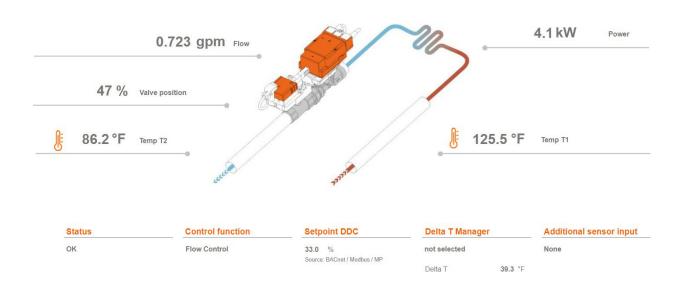

Platform for on-site Energy Valve optimization

The Belimo Clear Edge is an analytical device that leverages the data from all installed Energy Valves in a BACnet Building Automation System (BAS). It automatically analyzes the Belimo Energy Valve data to optimize, manage, and monitor key performance indicators of water coil performance and hydronic energy consumption. The Clear Edge offers trending capability with automated Delta T setpoint adjustment to increase system performance and energy savings strategies. An internet connection is not needed.

The Belimo Clear Edge technology is accessible as a plug-in for SkySpark from Stackhub (www.stackhub.org).



FEATURES

- Aggregated Start Screen

A simplified view of Key Performance Indicators (KPI's) including BACnet object name, instance number, supply and return temperatures, Delta T, delta setpoint, flow, current energy usage, and 30 days of energy consumption.

- Energy Dashboard

Input cost and kWh data, pump efficiency, and other building specific variables provide aggregated cost and energy savings due to reduced pumping. Reporting is available by the day, month, quarter, and year.

Automatic and Continuous Delta T Optimization

Software analytics providing the optimal Delta T and flow setpoints, which are automatically written to the Delta T Manager to save time and improve efficiency.

- Coil Power and Delta T Curves

Scatter plots that automatically generate load profiles and flow saturation points of coil characteristics and Delta T performance.

- Setpoint Configuration

Change parameters on installed Energy Valves individually or collectively.

- Automatic Discovery

Energy Valves on a BACnet network are viewable with a single click. Point mappings automatically provide fast and easy analysis and optimization.

Most capable valve in the HVAC industry

Smart phone configuration Cloud Analytics Glycol Monitoring Commissioning Report Power over Ethernet Dynamic Balancing	
Glycol Monitoring Commissioning Report Power over Ethernet	✓ ✓ ✓ ✓
Commissioning Report Power over Ethernet	✓ ✓ ✓
Power over Ethernet	✓ ✓ ✓
	✓
Dynamic Balancing ✓	✓
Energy Meter w/ additional sensor input	
Power Control	
Delta T Manager	
Live Data and Coil History	
CCV Technology	
Leakage ANSI CI	ass IV 0%
High Close-off	→
Low Minimum Pressure Drop	→
Field Configuration	√
Bus Communication	BACnet MS/TP or IP, Modbus RTU or TCP/IP and MP Bus
Password Configuration	
Set-Up Wizard	
Certification for Tentant billing	
5-Year Warranty	· · · · · · · · · · · · · · · · · · ·

^{*}Typical pressure independent valves based on globe valve technology.

Awards and accolades



Belimo Energy Valve Retrofit at Tennessee State Office Building Reduces District Energy Chilled Water Usage by 49%

"As a result of the retrofit project, we were able to reduce chilled water pumping by 49%, which equated to about \$23,000 in annual savings", said Chad Lovell. "The total cost of the project, including installation, was \$53,474. A simple financial calculation produced a payback in about 2.4 years. The installation of Energy Valves in Citizens Plaza, Rachel Jackson, and the Andrew Jackson building was a major success. The results exceeded my expectations. We now have savings that we can see."



Red Wing School District will Achieve Payback in Under Two Years.

"Savings are always difficult to quantify for new buildings; however, at River Bluff, we are pumping approximately 50% less water than that of a similar sized building in our district," Kevin Johnson, Director of Building and Grounds and Technology Director, Red Wing School District said. "This equates to substantial pump cost savings over the long-term and represents an improvement over traditional valves, which often deliver far more GPM than needed to maintain temperature setpoints."



Belimo Energy Valve™ Cures Medical University's Low Delta T!

"The University started seeing a 10-degree Delta T," said Scott Czubkowski, PE, Director of Engineering at Kerney Associates. "It went from a 7-degree to a 10-degree Delta T within a day." But that was not all. Kerney and Associates found that within one hour, the system went from using 600 gallons of water to 100 gallons per minute.



New Energy Valve Technology at Charles Hayden Library Reaps the Rewards of Higher Delta T!

"One thing that impressed us was having such intelligence right on the valve actuator," said Peter Cooper, Manager of Sustainable Engineering and Utility Planning at MIT, Hayden Library. "You can characterize a coil's performance with just a couple of pieces of data and with that information you can observe the degradation of coils and refocus your maintenance efforts accordingly."

Awards

2019

Control Trends: HVAC Control Valve
 Solution of the Year

2018

EnergieGenie Award

2017

- AHR Expo: Innovation Award Finalist

2016

- ACME: Innovation Award
- Poznan International Trade Fair:
 Gold Medal
- Control Trends: Energy Savings
 Solution Product of the Year

2015

- Energy Show: Best Energy Efficient
 Product of the Year
- AREX: Award of Excellence
- CSA: Innovation in Commissioning
- Deutscher Rechenzentrumspreis:
 German Data Centre Prize

2014

- Control Trends: Energy Saving
 Product of the Year
- AHR EXPO: Innovation Award
- Shanghai Energy Conference:Golden Key Award
- Poznan International Trade Fair:
 Gold Medal

2013

- Building Efficiency Congress Fair:
 Building Efficiency Award
- Interclima Show: Silver Trophy Award
- BCIA: Technical Innovation of the Year
 Products
- Trade Fair: Building Efficiency
- Innovation Competition:Intelligent Energy Management

2012

- Control Trends: Best Commercial
 Product of the Year
- HVR Awards: Air Conditioning Product of the Year

P_35 - 04/2023 - Subject to technical modificatio

All inclusive

At Belimo, we continually invest in new technologies that increase customer value by improving occupant comfort, energy efficiency, simplified installation, and maintenance-free operation. Our sales team is available to consult and provide insight and advice on how to achieve the best solution to help increase your system performance. Belimo will continue to focus on providing you with exceptional product availability, fast delivery times, and world-class customer service and technical support. We remain dedicated to continuously improve our standards and are committed to providing you the highest value possible.

Whatever your HVAC application, our global network of support experts are on hand and ready to assist.





5-year guarantee



On site around the globe



Complete product range



Tested quality



Short delivery time



Comprehensive support

Belimo Americas

USA, Latin America, and the Caribbean: www.belimo.us Canada: www.belimo.ca, Brazil: www.belimo.com.br Belimo Worldwide: www.belimo.com

