

TotalSense Series Duct Air Quality Sensor

Build a complete air quality system for indoor, duct, and outdoor
Six environmental sensors: PMx, VOC, CO2, RH, T, barometric pressure
BACnet/Modbus or analog outputs with set-point relay
Pair with an IOTBuddy for BACnet IP or IOT Connection



DESCRIPTION

The TotalSense Series Duct AQ sensor provides more data for more advanced ventilation control while drastically reducing installation cost and time on a project. It includes a comprehensive selection of AQ sensing with carbon dioxide (CO2), relative humidity (RH), and temperature plus options for total volatile organic compounds (TVOC), barometric pressure and particulate matter (PM).

APPLICATIONS

- Measure duct air quality to validate filtration systems and deliver fresh air
- Verify effectiveness of IAQ strategies in post covid environment
- Energy management/building control
- Facilitates compliance with ASHRAE 62.1 standard for air quality
- Contributes toward satisfying Feature A08 and T06 under the WELL Building Standard®




Fully configurable display

★ ±30PPM CO2	★ TEMPERATURE
★ RELATIVE HUMIDITY ±2%	★ PARTICULATE MATTER
BAROMETRIC PRESSURE	TVOC

★ Industry leading accuracy.

- NDIR CO2 element, ±30ppm, ±3%
- ±2% relative humidity ppm,

Choose up to 6 air quality indicators



Build a full validation system

Built for building automation.



Available with analog or...



Replaceable CO2, RH, and temp sensors



RESET monitors are tested and certified for your RESET Air Projects

FEATURES

- NEW! Configuration App with Senva Sync
- Reduce installation costs with multiple sensors in a rugged, easy-mount duct enclosure
- Specify the exact product for your application and made in USA
- Sense unhealthy particulates or TVOC's in your duct system
- Industry-leading temperature and barometric pressure compensated CO2 sensing with non-dispersive infrared sensing element (NDIR), 15+ year life expectancy on CO2 sensing element; ±30ppm, ±3% of reading
- Tamper-proof
- Field-replaceable RH, Temp, and CO2 sensors ease maintenance
- 7-year limited warranty / 3 years on CO2 sensor - 2 years on all others

ORDERING

AQ2	<input type="checkbox"/> D	-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Mounting Type		Output Type	CO2 Sensor	Humidity Sensor (RH)	Total Volatile Organic Compounds (TVOC)	Particulate Matter (PM)	Temperature	Display
	D = Duct Mount		A = Analog B = BACnet/Modbus	A = None C = CO ₂ Sensor D = Dual Channel CO ₂	A = None 2 = 2% RH Sensor	A = None V = TVOC	A = None C = CO P = PM 1.0, 2.5, 4.0, 10.0 O = O ₃ ** Q = PM + O ₃ ** R = PM + CO*	A = None B = Transmitter C = 100PtRTD D = 1000PtRTD E = 10K Type 2 F = 10K Type 3 G = 10K W/ 11K H = 3K I = 2K2 J = 1K8 K = 20K	X = None D = OLED Display

* CO sensor only available with display for calibration purposes.

** Ozone (O3) only available with Temp/RH for calibration purposes


*** Choose Transmitter option for OLED temperature display and temperature readings over BACnet/Modbus. Thermistor versions not available to display on OLED or to read over BACnet/Modbus.

Example Mount Output CO₂ RH TVOC PM Temp Display

AQ2 D - B C 2 V P F D

(TotalSense Duct mount sensor with BACnet/Modbus RS-485, Temp, CO2, 2% RH, VOC, PM, 10K Type 3 Temperature, OLED Display)

DIMENSIONS

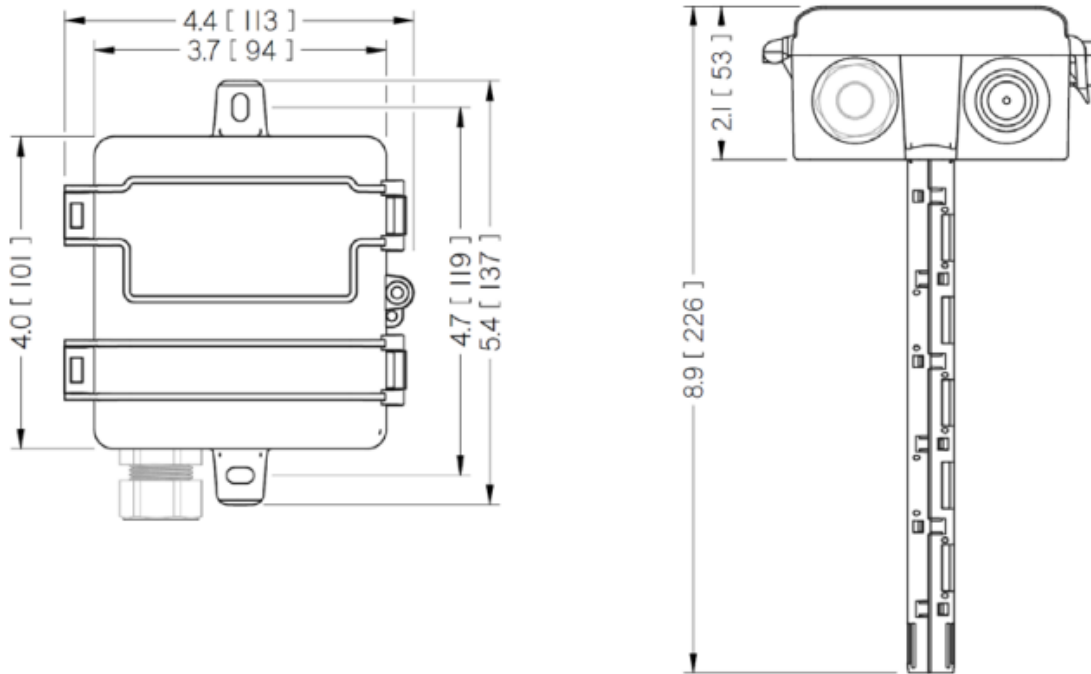

Warning: The datasheet is designed for reference only. Refer to installation instructions that accompany the product and heed all safety instructions. Product improvement is a continuing process at Senva. Changes may occur to products without prior notice.

SPECIFICATIONS

Power Supply	Non-Display	16-30VDC/24VAC(1), 3.5W nominal, 4W max.
	Display or LED Ring	24-30VDC/24VAC(1), 4.3W nominal, 5W max.
Interface	OLED (optional)	1.5" Organic LED Display, 128x128, color
	Air Quality Ring	Color changing (red/yellow/green) LED Air Quality Ring
Analog Outputs (Analog or Dual version only)	Quantity	Up to 3 outputs
	Source	CO ₂ , RH%, Temp, TVOC, PM, CO, Ozone (selectable)
	Scale	0-5V, 0-10V, 4-20mA (switch selectable, programmable per output)
Protocol Output (Comms or Dual version only)	Protocol	BACnet MS/TP or Modbus RTU
	Connection	3-wire RS-485, with isolated ground
	Data Rate	9600, 19200, 38400, 57600, 76800, 115200 (switch selectable)
	Address Range	0-127
Relay	Type	Solid-state output, 1A @ 30VAC/DC, N.O.
	Polarity	NO/NC (selectable)
	Source	CO ₂ setpoint, RH setpoint, Temp setpoint, TVOC setpoint, PIR motion detection, Air Quality, off (selectable)
CO ₂ (Optional)	Type	Non-dispersive Infrared (NDIR)
	Accuracy	±(30ppm + 3% of reading) (400-2,000ppm), -10-50°C, 0-85%RH
		±(50ppm + 5% of reading) (2,000-5,000ppm), -10-50°C, 0-85%RH
		>5,000ppm consult factory
	Resolution	1 ppm
	Range	0-2,000 PPM (Default) (Programmable up to 10,000ppm)
	Response time	90 seconds to 90% reading
Sample rate	1s	

Relative Humidity (Optional)	Temp and Pressure Compensation	Yes, barometric pressure readable over comms
	Type	Digital CMOS
	Accuracy(2)	2% models, +/-2% over 0 to 80%RH range
	Resolution	0.05%RH
	Response time (3)	30s
	Sample rate	3s
	Operating range	0 to 100%RH (non-condensing)
	Operating conditions (4)	-4 to 140oF (-20 to 60° C) @ RH>90%; -4 to 176oF @ RH=50%
Temperature Transmitter (Optional)	Type	Silicon Band-gap
	Nominal Accuracy	±0.3° C (operating range)
	Maximum Accuracy (2)	±0.5° C (at 25° C), ±1.0° C
	Resolution	0.1° C
	Response time	30s
	Sample rate	3s
TVOC (Optional)	Type	MOS
	Gas	Total VOC
	Formaldehyde CH2O Sensitivity	Responsive to Formaldehyde concentrations 50-1000 ppb
	Range	0-32,000 µg/m3 (Display may be programmed to show PPB)
	Response Time	<10s
	Accuracy (5)	±20 µg/m3 + 15% at 1 to 500 µg/m3 (typical)
	Output	0-2,000 µg/m3 (default) programmable up to 32,000 µg/m3
PMx (Optional)	Type	Optical
CLASS 1 LASER PRODUCT	Size Range	PM1.0, PM2.5, PM4.0, PM10.0
	Scale	0-1,000 µg/m3
	Lower detection limit	0.3 µm
	Precision	±10 µg/m3 (0-100µg/m3); ±10% (100-1,000 µg/m3)
	Long-Term Drift	±1.25 µg/m3 / year
	Carbon Monoxide	Type
Detection Range		0-200 ppm
Accuracy		5% of reading
Resolution		1 ppm
Response Time		60 seconds
Ozone	Type	PMOS
	Ozone Detection Range	20-500 ppb
	Accuracy	±15% of FS @ 20° C
PIR (Optional)	Type	Passive Infrared
	Axis X field of view	140o, 15 ft (4.5m)
	Axis Y field of view	76o, 15 ft (4.5m)
Operating Environment	Temperature	32 to 122oF (0 to 50oC)
	Humidity	0-95% non-condensing
Enclosure	Material	ABS Plastic
	Dimensions	4.0"h x 4.4"w x 2.1"d (+6.8" probe)
Compliance	Agency	CE, RoHS

(1) One side of transformer, secondary is connected to signal common. Dedicated transformer is recommended.

(2) Models with PM sensor included achieve ±5% accuracy over 0 to 80%RH range and an additional temperature shift of up +0.5° C.

(3) Time for reaching 63% of reading at 25° C and 1 m/s airflow.

(4) Long term exposures to conditions outside normal range at high humidity may temporarily offset the RH reading (+3%RH after 60 hours).

(5) Wiring with silicone or other high VOC insulation will affect TVOC readings.

** Product improvement is a continual process at Senva and product features and specification may change without prior notice. Refer to instructions that accompany the product for installation and wiring.*