


Functional Devices, Inc. 101 Commerce Drive, Sharpsville, IN 46068 Email: sales@functionaldevices.com | Website: www.functionaldevices.com Office: (765) 883-5538 | Fax: (765) 883-7505 Toll Free: (800) 888-5538

AC POWER SUPPLIES: 120 VAC TO 24 VAC

PSC40AB10

Single 40 VA Power Supply, 120 Vac to 24 Vac, 10 Amp Main Breaker, Metal Enclosure

PSC100AB10 Single 100 VA Power Supply, 120 Vac to 24 Vac,

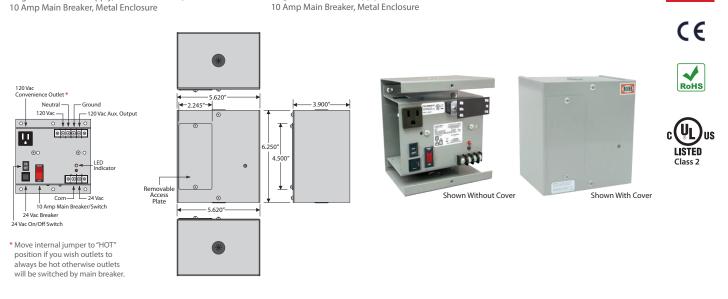

SPECIFICATIONS

| Transformer: | One 40 VA Split-Bobbin, Inherently Limited (PSC100AB10) One 100 VA Split-Bobbin, Circuit Breaker (PSC100AB10) | Main Breaker ON/OFF: | Switch / Breaker (10 Amp) (Kills power to entire unit: Outlets, Aux. Output, & Transformer)* Total Combined Output 9A | • To or • To or |
|----------------|--|---------------------------|--|--------------------|
| Primary: | 120 Vac | Mounting: | Mounting plate included (as shown) | |
| Secondary: | 24 Vac, w/ LED Indicator | Max. Ambient Temperature: | 40° C | |
| Frequency: | 50/60 Hz | Approvals: | Class 2 (UL Approved UL5085-3), UL916, | |
| 24 Vac ON/OFF: | On / Off Switch & Breaker | | C-UL, CE, RoHS | |
| | | Dimensions: | 6.250″ H x 5.620″ W x 3.900″ D | |
| | | Origin: | Made of US and non-US parts | |

es:

- order without enclosure, see PSB40AB10
- order without enclosure, see PSB100AB10.