

## Butterfly Valve with ANSI Class 300 Lug types

- Disc 316 stainless steel
- Bubble tight shut-off
- Teflon seat
- Valve face-to-face dimensions comply with API 609 & MSS-SP-67
- For use with dead-end service
- Completely assembled and tested, ready for installation
- The SHP series are Flowseal® valves manufactured by the Crane Company.



5-year warranty

Picture may differ from product

## Type overview

Type	DN
F765-300SHP	65

## Technical data

Functional data	
Valve size [mm]	2.5" [65]
Fluid	chilled or hot water, up to 60% glycol
Fluid Temp Range (water)	-22...400°F [-30...204°C]
Body Pressure Rating	ANSI Class 300
Close-off pressure Δps	285 psi
Flow characteristic	modified linear, unidirectional
Leakage rate	0%
Pipe connection	Flange for use with ASME/ANSI class 300
Servicing	maintenance-free
Flow Pattern	3-way Mixing/Diverting
Controllable flow range	quarter turn, mechanically limited
Cv	146
Maximum Velocity	32 FPS
Lug threads	3/4-10 UNC
Materials	
Valve body	Carbon steel full lug (ASME B16.34)
Stem	17-4 PH stainless steel
Seat	RPTFE
Bearing	glass backed PTFE
Disc	316 stainless steel
Suitable actuators	
Non Fail-Safe	2*GMB(X) PRB(X)
Electronic fail-safe	2*GKB(X) PKRB(X)

## Safety notes



- WARNING: This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)


## Product features

## Flow/Mounting details




## Dimensions


Type	DN	Weight
F765-300SHP	65	46 lb [21 kg]

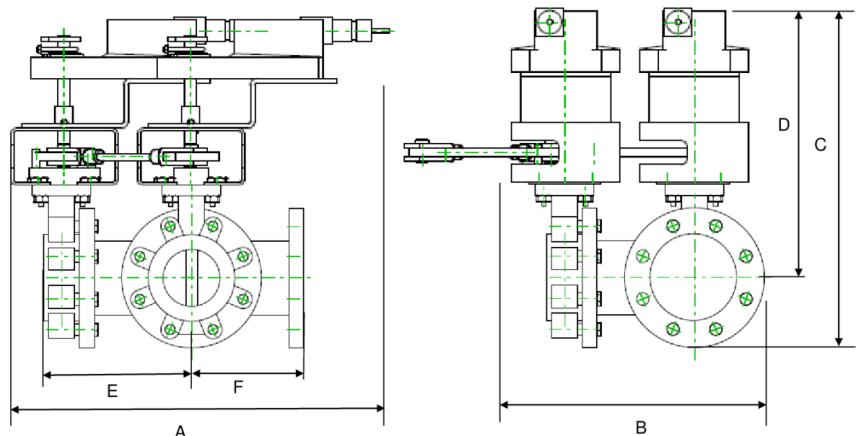

A	B	C	D	E	F	Number of Bolt Holes
17.3" [440]	10.9" [277]	16.0" [406]	12.5" [318]	7.4" [187]	5.5" [140]	8

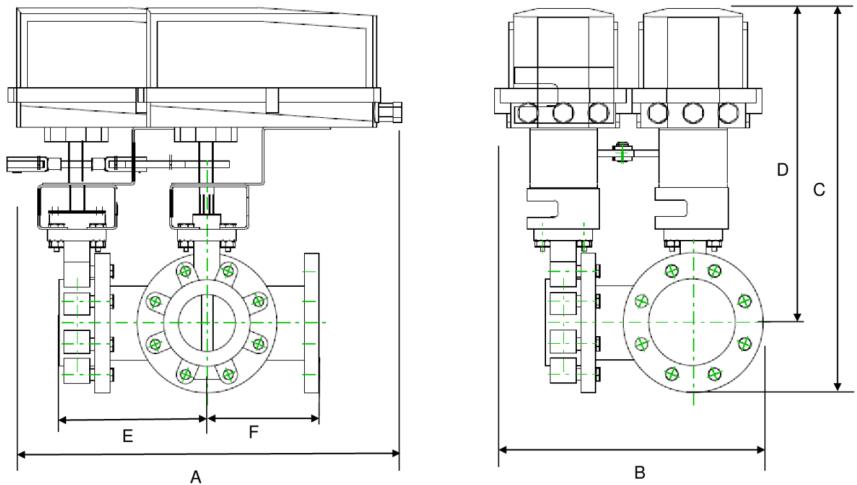


A	B	C	D	E	F	Number of Bolt Holes
20.6" [522]	10.9" [277]	17.4" [443]	13.8" [350]	7.4" [187]	5.5" [140]	8

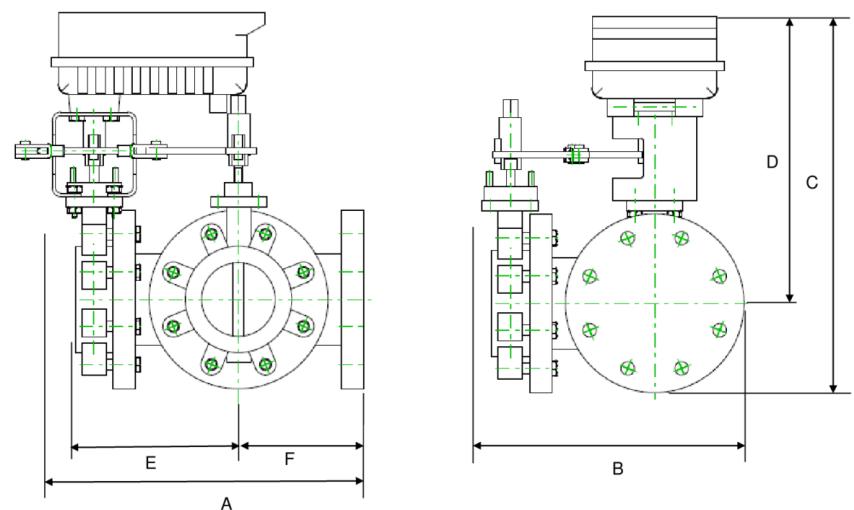

A	B	C	D	E	F	Number of Bolt Holes
17.3" [440]	10.9" [277]	15.3" [389]	11.8" [300]	7.4" [187]	5.5" [140]	8

## Dimensions

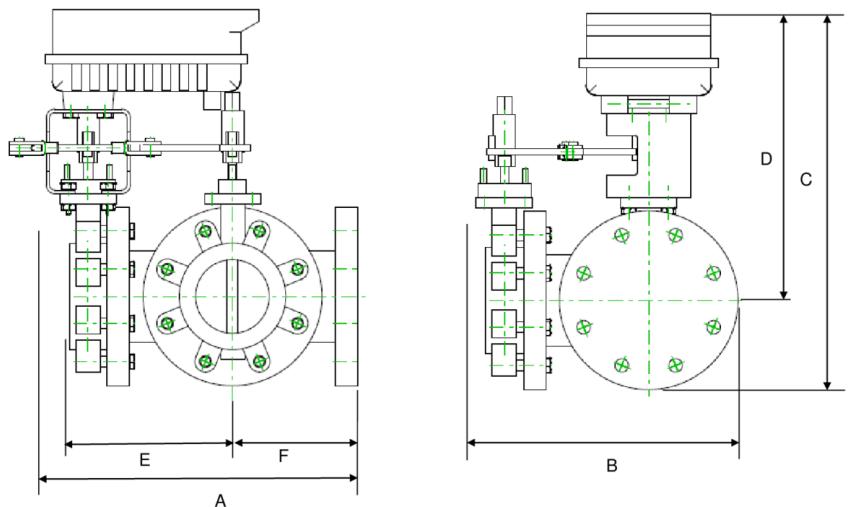

A	B	C	D	E	F	Number of Bolt Holes
15.1" [383]	10.9" [277]	20.3" [515]	16.8" [426]	7.4" [187]	5.5" [140]	8

MFT/programmable, Electronic fail-safe, 24 V



5-year warranty



## Technical data

Electrical data	Nominal voltage	AC/DC 24 V
	Nominal voltage frequency	50/60 Hz
	Nominal voltage range	AC 19.2...28.8 V / DC 21.6...28.8 V
	Power consumption in operation	12 W
	Power consumption in rest position	3 W
	Transformer sizing	40 VA
	Electrical Connection	18 GA plenum cable, 1 m, 3 m, or 5 m with 1/2" NPT conduit connector, degree of protection NEMA 2 / IP54
	Overload Protection	electronic throughout 0...95° rotation
Functional data	Operating range Y	2...10 V
	Operating range Y note	4...20 mA w/ ZG-R01 (500 Ω, 1/4 W resistor)
	Input impedance	100 kΩ for 2...10 V (0.1 mA), 500 Ω for 4...20 mA, 1500 Ω for PWM, On/Off and Floating point
	Operating range Y variable	Start point 0.5...30 V End point 2.5...32 V
	Operating modes optional	variable (VDC, on/off, floating point)
	Position feedback U	2...10 V
	Position feedback U note	Max. 0.5 mA
	Position feedback U variable	VDC variable
	Bridging time (PF)	2 s
	Bridging time (PF) variable	0...10 s
	Pre-charging time	5...20 s
	Direction of motion motor	selectable with switch 0/1
	Direction of motion fail-safe	reversible with switch
	Manual override	external push button
	Angle of rotation	Max. 95°
	Angle of rotation note	adjustable with mechanical stop
	Running Time (Motor)	150 s / 90°
	Running time motor variable	95...150 s
	Running time fail-safe	<35 s
	Noise level, motor	52 dB(A)

## Technical data

<b>Functional data</b>	Noise level, fail-safe	61 dB(A)
	Position indication	Mechanical, 30...65 mm stroke
<b>Safety data</b>	Power source UL	Class 2 Supply
	Degree of protection IEC/EN	IP54
	Degree of protection NEMA/UL	NEMA 2
	Enclosure	UL Enclosure Type 2
	Agency Listing	cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02 CE acc. to 2014/30/EU and 2014/35/EU
	Quality Standard	ISO 9001
	UL 2043 Compliant	Suitable for use in air plenums per Section 300.22(C) of the NEC and Section 602 of the IMC
	Ambient humidity	Max. 95% RH, non-condensing
	Ambient temperature	-22...122°F [-30...50°C]
	Storage temperature	-40...176°F [-40...80°C]
	Servicing	maintenance-free
<b>Weight</b>	Weight	[]
<b>Materials</b>	Housing material	Galvanized steel and plastic housing

**Footnotes** †Rated Impulse Voltage 800V, Type of action 1.AA, Control Pollution Degree 3

## Product features

<b>Bridging time</b>	Power failures can be bridged up to a maximum of 10 s.  In the event of a power failure, the actuator will remain stationary in accordance with the set bridging time. If the power failure is greater than the set bridging time, the actuator will move into the selected fail-safe position.  The bridging time set at the factory is 2 s. It can be modified on site in operation by means of the Belimo service tool MFT-P.  Settings: The rotary knob must not be set to the "PROG FAIL-SAFE" position!  For retroactive adjustments of the bridging time with the Belimo service tool MFT-P or with the ZTH EU adjustment and diagnostic device only the values need to be entered.
----------------------	--

## Accessories

Electrical accessories	<b>Gateways</b>	<b>Description</b>	<b>Type</b>
	Gateway MP to BACnet MS/TP		UK24BAC
	Gateway MP to Modbus RTU		UK24MOD
	Gateway MP to LonWorks		UK24LON
	<b>Description</b>	<b>Type</b>	
	Feedback potentiometer 140 Ω add-on, grey	P140A GR	
	Feedback potentiometer 500 Ω add-on, grey	P500A GR	
	Feedback potentiometer 1 kΩ add-on, grey	P1000A GR	
	Feedback potentiometer 2.8 kΩ add-on, grey	P2800A GR	
	Feedback potentiometer 5 kΩ add-on, grey	P5000A GR	
	Feedback potentiometer 10 kΩ add-on, grey	P10000A GR	
	Auxiliary switch 1x SPDT add-on	S1A	
	Auxiliary switch 2x SPDT add-on	S2A	

## Accessories

Description	Type
Service tool, with ZIP-USB function, for programmable and communicative Belimo actuators, VAV controller and HVAC performance devices	ZTH US
Tools	Description
	Connecting cable 10 ft [3 m], A: RJ11 6/4 ZTH EU, B: 3-pin Weidmüller and supply connection
	Service tool, with ZIP-USB function, for programmable and communicative Belimo actuators, VAV controller and HVAC performance devices
	ZK4-GEN
	ZTH US

## Electrical installation

## ☒ INSTALLATION NOTES


- Ⓐ Actuators with appliance cables are numbered.
- Ⓑ Provide overload protection and disconnect as required.
- Ⓒ Actuators may also be powered by DC 24 V.
- Ⓓ Only connect common to negative (-) leg of control circuits.
- Ⓔ A 500  $\Omega$  resistor (ZG-R01) converts the 4...20 mA control signal to 2...10 V.
- Ⓕ Control signal may be pulsed from either the Hot (Source) or Common (Sink) 24 V line.
- Ⓖ For triac sink the Common connection from the actuator must be connected to the Hot connection of the controller. Position feedback cannot be used with a triac sink controller; the actuator internal common reference is not compatible.
- Ⓗ IN4004 or IN4007 diode. (IN4007 supplied, Belimo part number 40155).
- Ⓘ Actuators may be controlled in parallel. Current draw and input impedance must be observed.
- Ⓛ Master-Slave wiring required for piggy-back applications. Feedback from Master to control input(s) of Slave(s).
- Ⓜ Meets cULus requirements without the need of an electrical ground connection.
- ⚠ Warning! Live electrical components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

## Wiring diagrams


On/Off

## 24 VAC Transformer

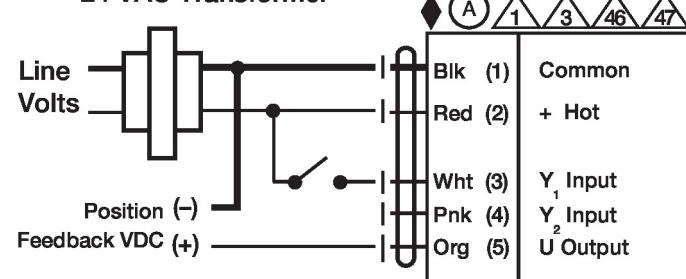

Floating Point


## 24 VAC Transformer (AC Only)

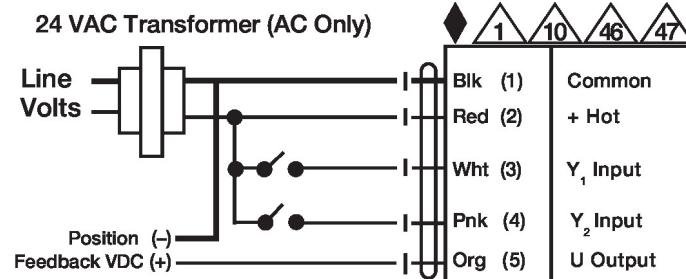


## Electrical installation

## Wiring diagrams


## VDC/mA Control

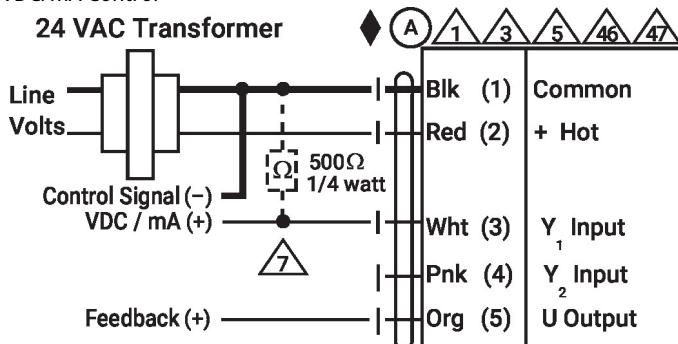

## PWM Control

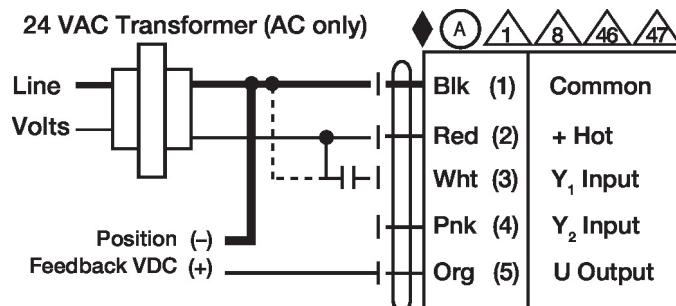

## Override Control

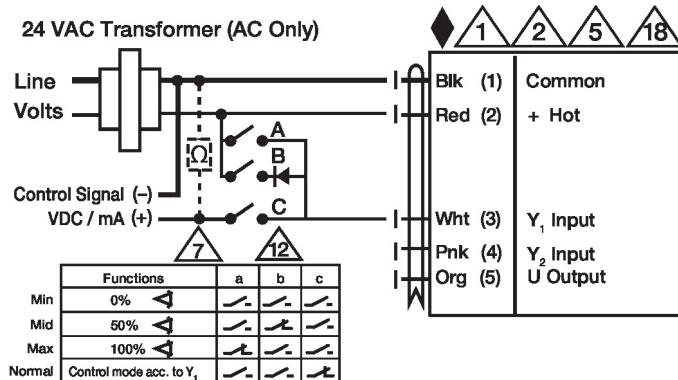

## Primary - Secondary

